

INNOVATIVE FILTRATION SOLUTIONS

UL Class 1





Tri-Dim's SYN-PAC E High Efficiency Extended Surface Bag Filter features a progressive density, electrostatically charged media that offers high efficiency at a minimal resistance to airflow.

MEDIA


Tri-Dim's SYN-PAC E filters utilize an advanced dual layer meltblown media. The medias dual layers allow for depth loading – that is managing the dirt by capturing larger particles on the 'prefilter' layer and having the second layer focus on removing the smaller 'target' particles. Depth loading results in much higher dirt holding capacity – allowing for long service life. The media is also electrostatically enhanced to yield high removal efficiencies of airborne particulates. The final layer of the SYN-PAC E media is a spun bonded scrim backing that supports and protects the filter media.

The combination of high removal efficiency and long service life makes Tri-Dim's SYN-PAC E a great value.

MOISTURE AND MICROBIAL RESISTANT

The SYN-PAC E filters are an excellent choice for high humidity and high moisture applications. The fibers and other components of the SYN-PAC E bag filter are unaffected by high humidity or moisture. There is no loss in efficiency or filter deterioration caused by moisture or humidity. Fiberglass bag filters are not recommended in applications where high humidity or moisture might be present.

The Syn-Pac E filter media will not support microbial growth – an added benefit for high moisture and sensitive applications. Optional Antimicrobial Treatment can add even more security.

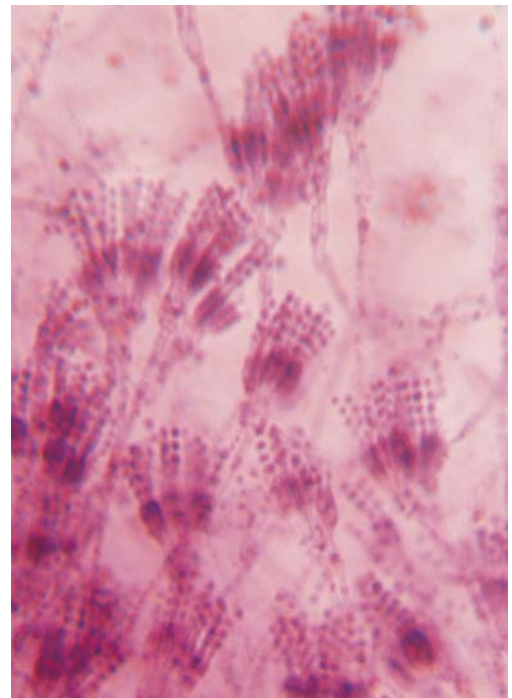

Microscopic view of microbial growth

CONSTRUCTION

Tri-Dim's SYN-PAC E filters are constructed in a controlled environment with the highest level of quality. The pockets seams are sealed with an adhesive to ensure no leakage and to minimize the surface area lost due to pocket construction.

The pockets are secured to double turned galvanized hoops that are secured to a roll formed header. This process prevents the bypass of unfiltered air and adds rigidity.

Tri-Dim's manufacturing process ensures the highest quality product.



OPTIONS

Efficiency – SYN-PAC E is available in four efficiencies – 40-45% (MERV 10), 60-65% (MERV 12), 80-85% (MERV 14) and 90-95% (MERV 15).

Standard Sizes – SYN-PAC E Extended Surface filters are offered in 41 standard size options – including five different pocket depths, five different height and width options and six different total number of pockets.

Custom Sizes – In addition the SYN-PAC E is available in virtually any combination of height, width, depth and number of pockets. There are some restrictions so please consult with the factory for availability.

Antimicrobial – SYN-PAC E comes with an optional antimicrobial treatment that is EPA registered. The antimicrobial is effective by inhibiting the growth of a large variety of microorganisms including bacteria, fungi, viruses and other microbials.



Wire Support – The wire support option allows for the continual support of the pockets by a series of wires attached to the back of the pockets and to the bottom of the header (*see photo left*). This support allows for the operation of the SYN-PAC E bag filters at a lower operating resistance and with enhanced dirt holding capacity. The wire support filters are ideal for use in VAV or other systems where airflow may not properly inflate the pockets to gain the maximum performance from the filters.

SPECIFICATIONS

EFFICIENCY

40-45%

ASHRAE 52.1 Dust Spot Initial 42.3%
 ASHRAE 52.1 Dust Spot Average 54.2%
 ASHRAE 52.2 MERV 10 @ 492 fpm

60-65%

ASHRAE 52.1 Dust Spot Initial 59.5%
 ASHRAE 52.1 Dust Spot Average 67.0%
 ASHRAE 52.2 MERV 12 @ 492 fpm

80-85%

ASHRAE 52.1 Dust Spot Initial 80.7%
 ASHRAE 52.1 Dust Spot Average 86.2%
 ASHRAE 52.2 MERV 14 @ 492 fpm

90-95%

ASHRAE 52.1 Dust Spot Initial 86.8%
 ASHRAE 52.1 Dust Spot Average 91.3%
 ASHRAE 52.2 MERV 15 @ 492 fpm

TEMPERATURE LIMIT

Maximum 140° F (60° C) Constant

FINAL RESISTANCE

1.50"W.G. (373 PA)

UL CLASS 1

SQUARE FEET OF MEDIA

24x24x22 8 Pocket 610x610x559	58 sq. ft. 5.4 m ²
12x24x22 4 Pocket 305x610x559	29 sq. ft. 2.7 m ²
24x24x26 8 Pocket 610x610x660	69 sq. ft. 6.4 m ²
12x24x26 4 Pocket 305x610x660	35 sq. ft. 3.3 m ²
24x24x30 8 Pocket 610x610x762	80 sq. ft. 7.4 m ²
12x24x30 4 Pocket 305x610x762	40 sq. ft. 3.7 m ²
24x24x36 8 Pocket 610x610x914	96 sq. ft. 8.9 m ²
12x24x36 4 Pocket 305x610x914	48 sq. ft. 4.5 m ²

Please note that other sizes, depths and pocket combinations are available.

OPTIONS


GPA Adaptor – Syn-Pac E Bag Filters come with the option of a GPA Header to allow for easy, time saving installation into Glide/Pack® housings.

Gasketing – Charcoal Ether Foam Gasketing is available on vertical sides, horizontal sides, upstream face or downstream face of header.

RESISTANCE TO AIRFLOW 40-45% AND 60-65%

24x24x30 8-Pocket


From Independent ASHRAE Test Results

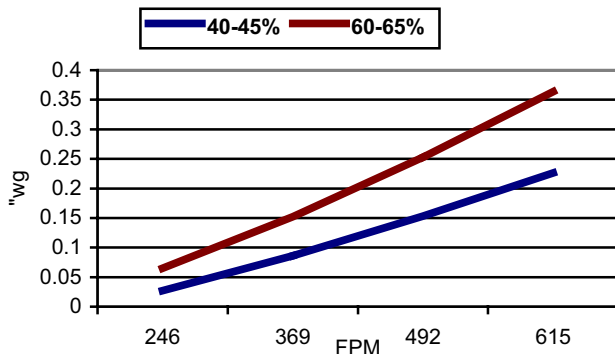

RESISTANCE TO AIRFLOW 80-85% AND 90-95%

24x24x30 8-Pocket

From Independent ASHRAE Test Results

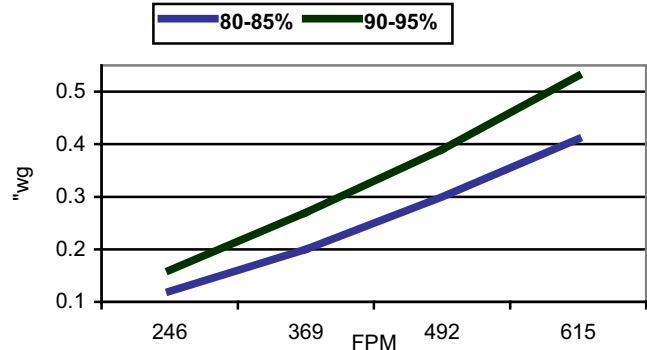

Tri-Dim Filter Corporation is committed to continual product development – all descriptions, specifications and performance data are subject to change without notice.

Tri-Dim® and Tri-Dek® are Registered Trademarks of Tri-Dim Filter Corporation. Syn-Pac™ is a Trademark of Tri-Dim Filter Corporation. Glide/Pack® is a Registered Trademark of Camfil Farr and is used for identification purposes only.



TRI-DIM FILTER CORPORATION

P.O. BOX 466 • 93 INDUSTRIAL DRIVE
 LOUISA, VA 23093

(540) 967-2600 • FAX: (540) 967-2835

EMAIL: info@tridim.com • Website: www.tridim.com

TOLL FREE 1-800-458-9835

Local Representation: